

UU078 rev03

T137 Mast Bracket (Single Display)

Package contents: Mast Bracket, 2 metal slugs, 4 M4 bolts, 2 velcro straps. Display fixing bolts are supplied with the display.

Note: If bracket will be removed it is advisable to apply silicon grease to slug and screws prior to fitting

Installation of Bracket


- 1 Drop a slug into the mast slot through the gate using a screwdriver end pushed through the slot to catch the slug. Use the upper bolt to secure the slug at the correct height.
- 2 Drop the second slug into the mast. Use the lower bolt to secure the slug at the correct height (there should be a 52mm gap between the two slugs).
- 3 Offer the bracket to the mast and check that the mounting slots in the bracket align correctly with the bolts on the slugs. Remove the bracket from the mast
- 4 Attach a Raymarine display to the bracket. Post three counter-sunk bolts through the bracket from the rear and screw into the back of the display. The captive nuts within the display will ensure a secure fixing.
Alternatively, attach a Race Master cradle. Pass four counter-sunk bolts through the cradle and through the front of the bracket, fasten at the rear with nuts and washers.
- 5 Fit the bracket/instrument over the bolt heads in the slugs in the mast, and tighten the bolts
- 6 Fit velcro straps through the slots in the wings of the bracket and around the front of the mast for additional rigidity if required.

Removal of Bracket

- 1 Loosen the bolts in the mounting slots of the bracket.
- 2 Lift bracket upwards and pull forward to remove.

WARNING : ensure the mounting bracket is secure and check that security bolts are tight before each race.

For further details contact your dealer or www.raymarine.com.

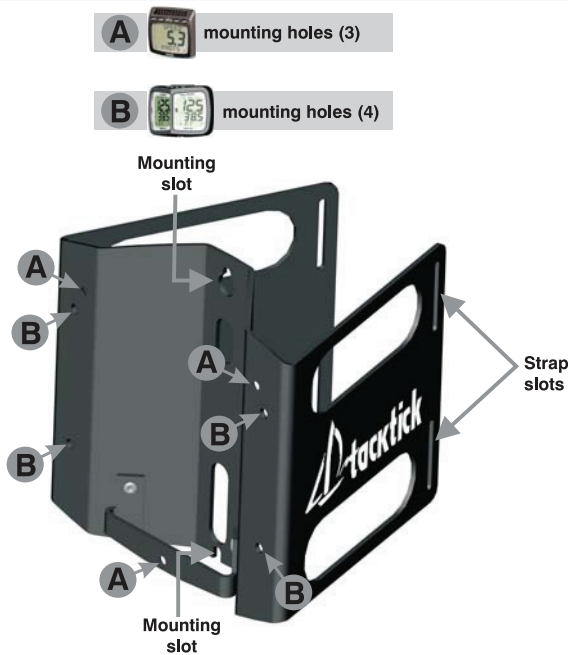

UU078 rev03

T137 Mast Bracket (Single Display)

Package contents: Mast Bracket, 2 metal slugs, 4 M4 bolts, 2 velcro straps. Display fixing bolts are supplied with the display.

Note: If bracket will be removed it is advisable to apply silicon grease to slug and screws prior to fitting

Installation of Bracket

- 1 Drop a slug into the mast slot through the gate using a screwdriver end pushed through the slot to catch the slug. Use the upper bolt to secure the slug at the correct height.
- 2 Drop the second slug into the mast. Use the lower bolt to secure the slug at the correct height (there should be a 52mm gap between the two slugs).
- 3 Offer the bracket to the mast and check that the mounting slots in the bracket align correctly with the bolts on the slugs. Remove the bracket from the mast
- 4 Attach a Raymarine display to the bracket. Post three counter-sunk bolts through the bracket from the rear and screw into the back of the display. The captive nuts within the display will ensure a secure fixing.
Alternatively, attach a Race Master cradle. Pass four counter-sunk bolts through the cradle and through the front of the bracket, fasten at the rear with nuts and washers.
- 5 Fit the bracket/instrument over the bolt heads in the slugs in the mast, and tighten the bolts
- 6 Fit velcro straps through the slots in the wings of the bracket and around the front of the mast for additional rigidity if required.

Removal of Bracket

- 1 Loosen the bolts in the mounting slots of the bracket.
- 2 Lift bracket upwards and pull forward to remove.

WARNING : ensure the mounting bracket is secure and check that security bolts are tight before each race.

For further details contact your dealer or www.raymarine.com.