


SCARE GULL

ScareGull Assembly and Fitting Instructions

Your Scaregull comprises of a hub - 2 arms - 2 sails, and a deck mounting block. The arms push into the hub and are secured with a stainless steel spring clip.


One sail is mounted on each arm as shown in diagram A and secured with a spring clip. This ensures that the Scaregull rotates clockwise.

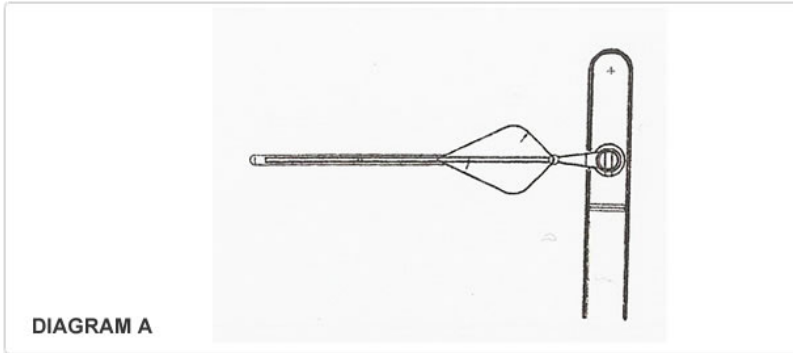

The deck mounting block can be fitted to any level surface with the 2 screws supplied (use a 3mm drill).

The mounting pin needs to be vertical to ensure proper rotation. If your deck or surface is not horizontal use our variable angle bracket for correction. If additional clearance is needed then longer mounting pins are available.

Always remove and store the Scaregull and pin before you get underway.

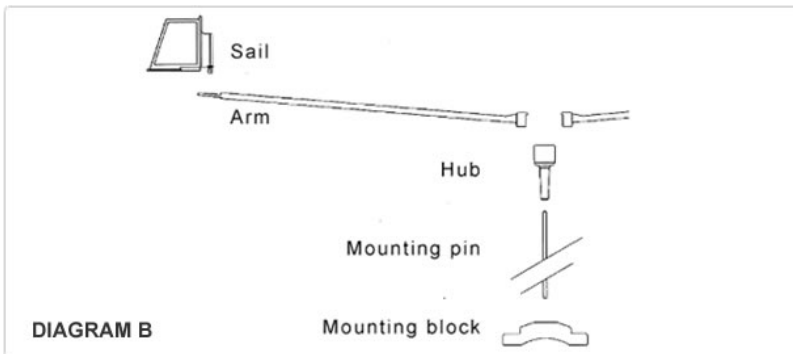

Scaregull has been tested in gales, however we recommend its removal in winds of more than 35MPH.

Additional Fixing Kits

The additional fixing kits allow the Scaregull to be mounted in a wide variety of ways.

Strap Fixing

3 metres long 25mm webbing strap including a pair of side release clips enables the standard mounting block to be secured in a number of locations.

- Around a furled sail and cover
- On top of a canvas hood or Bimini cover
- On a curved cabin top



Variable Angle Bracket

Allows the standard mounting block to be installed on an angled surface. The bracket is easily bent to allow the pin to be in a vertical position.



225mm (9") Mounting Pin

For use when the Scaregull needs to be raised to miss obstructions such as hand rails. The standard mounting pin is 150mm (6")



300mm (12") Mounting Pin

For use when the Scaregull needs to be raised to miss obstructions such as hand rails. The standard mounting pin is 150mm (6")



Soft Canvas Fitting

Allows the Scaregull to be mounted in a variety of places (without drilling holes), on a cabin roof, around a furled sail, on top of a bimini. The canvas can be tied down with a strap, rope or bungee cord.



U Bolt

Allows the Scaregull to be mounted on any handrail (up to diameter 25mm / 1"). It can also be used under a waterproof cover such as a Cuddy or Bimini.



Detachable Rail Fixing

Allows the Scaregull to be fitted to any hand rail – easily removable when under way (rail diameter up to 32mm / 1.25").

